


# Movers – Aero Whirl

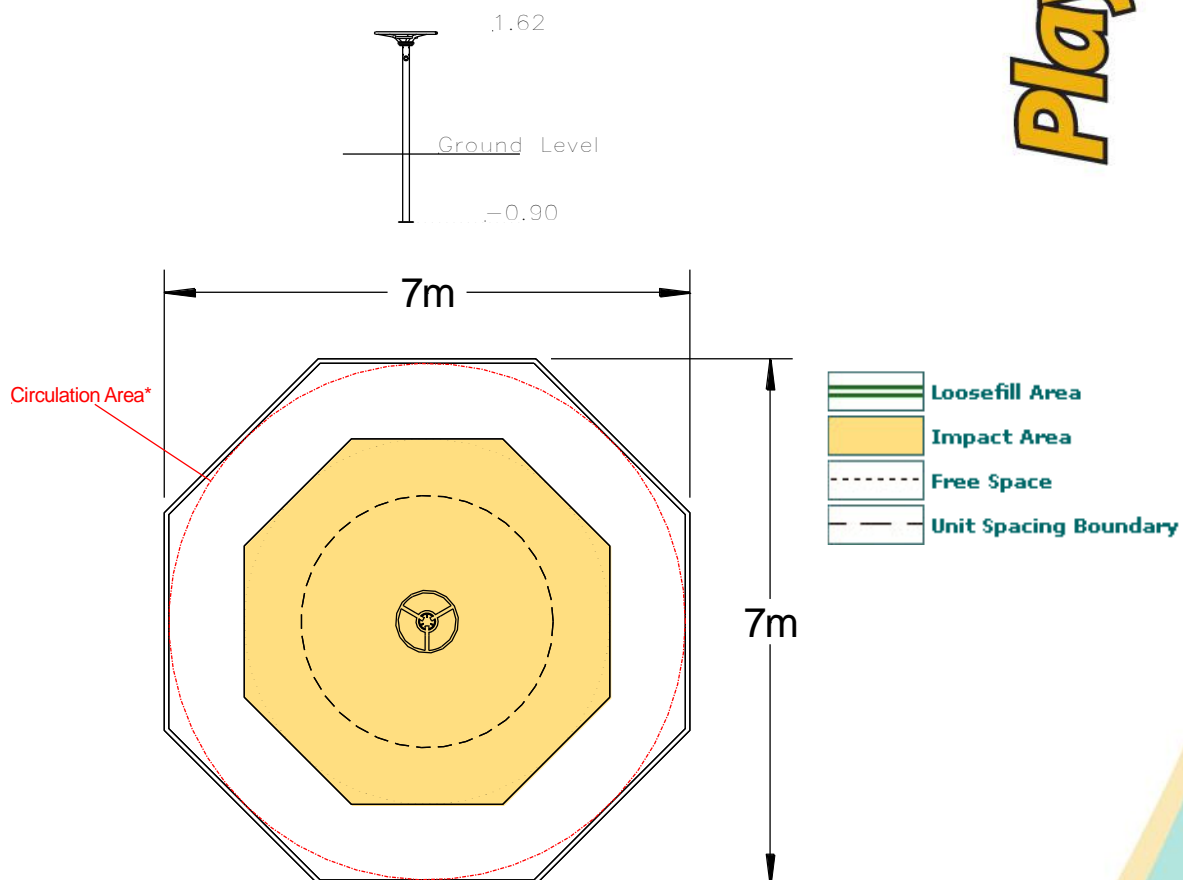

\* Recommended Circulation Area (1m outside impact area) – this area should be clear of solid raised objects (ie.fences, walls, trees and other items of equipment). Loose fill retaining edgings are acceptable in this area.

## Technical Information

### Equipment Dimensions

Length / Width / Height **0.9m x 0.9m x 1.6m**

### Surfacing and Area Required

Minimum Space Required L/W/H **7m x 7m x 2.8m**

Max Gradient of Ground **1 in 50**

Free Height of Fall **1.00m**

Impact Area **19.12m<sup>2</sup>**

Loosefill at 250mm **10m<sup>3</sup>**

Bark / Cushionfall / Sand

Grasslok Tiles

**n/a**

### Installation Information

Overall Weight **34kg**

Heaviest Part **22kg**

Largest Part **2.3m x 0.2m x 0.2m**

Longest Part **2.3m**

Concrete Required **0.1m<sup>3</sup>**



KITEMARKED TO BS EN 1176