



WARNING:
NOT SUITABLE FOR CHILDREN UNDER 3 YEARS
OLD, DUE TO POTENTIAL SMALL PARTS

- Adult supervision required
- Periodically check and retighten any bolts and wheels

C1182 & C1183 - Mobile Drying Racks


ADULT ASSEMBLY IS REQUIRED FOR THIS PRODUCT

1. Unpack your drying rack and check parts and for damage. The instructions are based on C1182 but the assembly is the same process throughout the range.


C1182 & C1183

- | | | | |
|----------------------|-----|----------------------|-----|
| • 2 x Wheel | [A] | • 4x Sprung washer | [E] |
| • 2 x Locking Wheel | [B] | • 1x Shelf Main Unit | [F] |
| • 4 x M8 Locking Nut | [C] | • 2x Wheel Legs | [G] |
| • 4 x M8 Bolt | [D] | | |

(1)

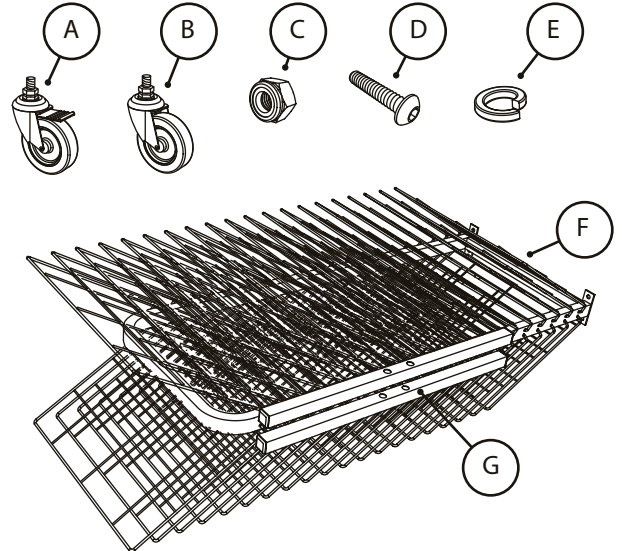

(2)

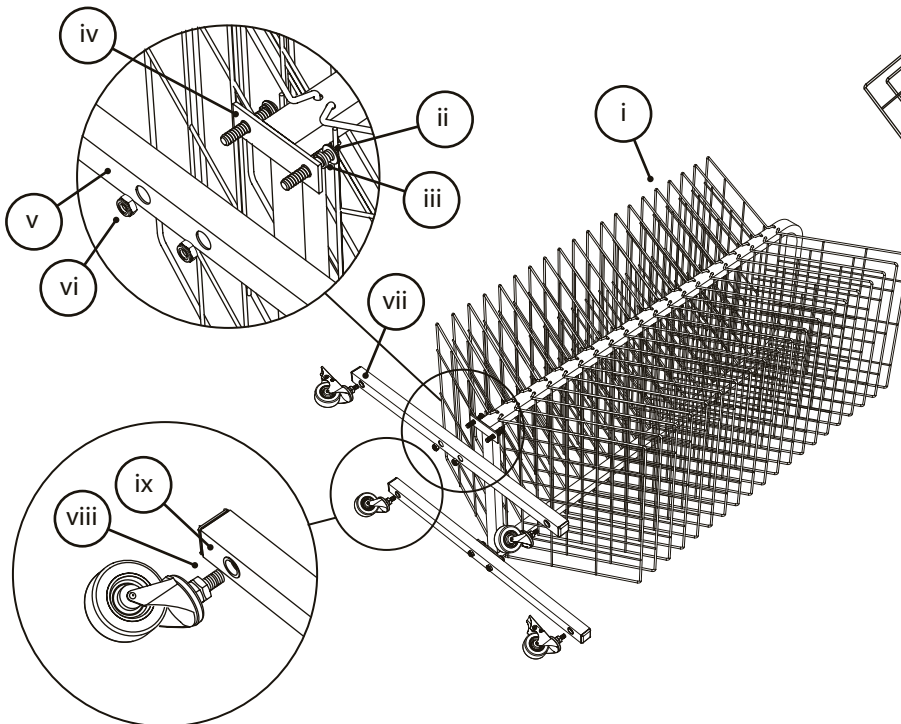


2. Lay the Shelf Main Unit (i) on its side. Insert the Bolt (ii) through the Sprung Washer (iii) then through the unit (iv) and Wheel Leg (v) and secure with Nylon Locking Nut (vi).

IMPORTANT: Make sure that the nut inserts on the Wheel Unit are facing the correct way (vii)

Repeat process to both legs in place.

Now take a wheel (viii), insert the screw into nut insert on Wheel Leg (ix). Repeat process. We find that placing locking wheels diagonally opposite works best.

(3)

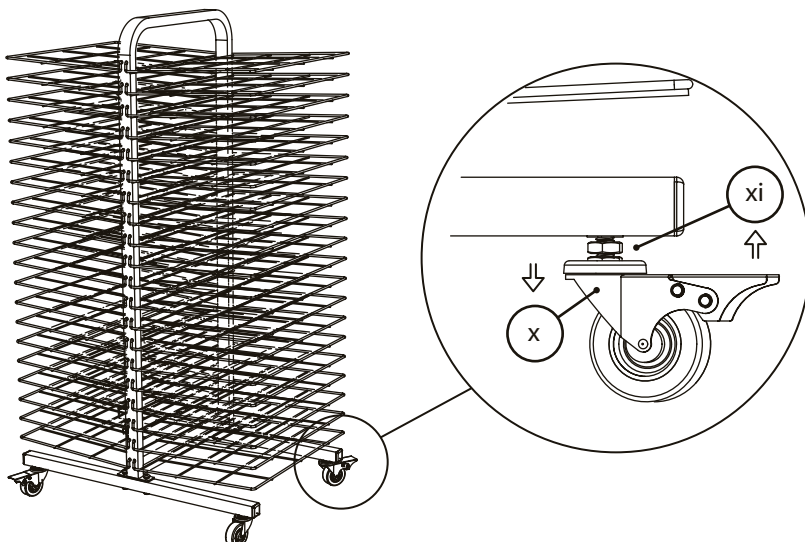

3. You can make adjustment if required to make the wheels sit flat. With your second person turn the unit over to sit on wheels. Undo one of the wheels (x) till sitting on the floor and level, then tighten nut (xi) up to Wheel Legs. Your unit is ready to use.

IMPORTANT:

The Mobile Trolley Units are designed for indoor use.

The Mobile Trolley Units should not be left outside.